

GLAZED PAVER TILE

UNION SQUARE™



 **dalTile**[®]
DESIGN WITH CONFIDENCE™

UNION SQUARE™

GLAZED PAVER TILE

floor • wall • countertop

Field Tile



TERRACE BEIGE US01



HEIRLOOM ROSE US02



COURTYARD RED US03



COBBLE BROWN US04

CREATIVE IDEAS



Pattern Ideas




HERRINGBONE



BASKETWEAVE



CORRIDOR
HORIZONTAL

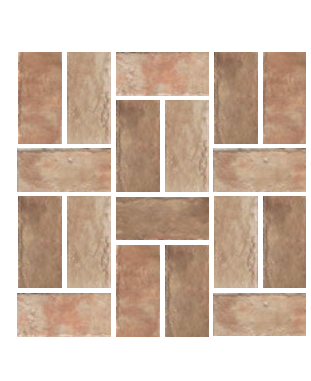

BRICK WEAVE VERTICAL

SIZES

		SQ.FT. CARTON	PCS. PER CARTON
4 x 8 Paver	(3-7/8" x 8") (9.8 cm x 20.3 cm)	8.00	36
2 x 8 Brick	(2-1/4" x 8") (5.7 cm x 20.3 cm)	6.25	50

RESIDENTIAL USAGE

FLOORS	WALLS	COUNTERTOPS	EXTERIOR PATIOS	EXTERIOR POOL DECKS
F	W	C	EP	ED

COMMERCIAL USAGE

	INTERIOR			EXTERIOR	
	LIGHT RESIDENTIAL	COMMERCIAL	COMMERCIAL	RESIDENTIAL	COMMERCIAL
Floors/Patios	✓	✓	✓	✓	✓
Walls/Backsplashes	✓	✓	✓	✓	✓
Countertops	✓	✓	✓	✓	✓
Pool Decking	✓	✓	✓	✓	✓
Pool Linings	✓	✓	✓	✓	✓

Suitable for freezing and non-freezing climates when proper installation methods are followed.

NOTES

Since there is shade variation in all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Strong random shading is a part of the natural beauty of this product. To achieve the maximum intended results, tile should be pulled from multiple cartons and placement decided upon prior to installation.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information, refer to "Factors to Consider" at <http://daltile.com/factors-to-consider.cfm>.

SHADE VARIATION



RANDOM (V4)
Extreme color and texture variation from tile to tile and within each tile; a random look.

INSTALLATION

THICKNESS	GROUT JOINT RECOMMENDATION
7/16"	3/8"

DYNAMIC C.O.F. (WET) : 2

The higher the rating, the higher the slip resistance.

1 < .42

2 ≥ .42

STATIC C.O.F. (WET) : 3

1 < .50

2 .50 - .59

3 ≥ .60

TEST RESULTS

	ASTM#	RESULT
Water Absorption	C373	< 1.5%
Breaking Strength	C648	> 400 lbs
Scratch Hardness	MOHS	7.5
Chemical Resistance	C650	Resistant
Dynamic C.O.F.	A137.1	Wet: ≥ 0.42
Static C.O.F.	C1028	Wet: ≥ 0.60 Dry: ≥ 0.80

Dynamic C.O.F. (Wet) value as measured by the DCOF AcuTest™ helps to assess a products suitability for a commercial environment. For more information, visit our website at www.daltile.com/DCOF.



By their very design, Daltile products can help make it easier for you to earn LEED™ points and/or points towards many industry leading green home building programs. From using recycled material content to establishing manufacturing facilities within 500 miles of your project, we help ensure you don't have to compromise your design to be environmentally conscious. For detailed information, visit daltilegreenworks.com.



MADE IN
THE U.S.A.



EXTERIOR
PRODUCT

All or selected items within this series are made in the USA. For more information visit www.daltile.com/UnionSquare



7834 C. F. Hawn Freeway | Dallas, TX 75217 | 214.398.1411 800.933.TILE
For more information about Daltile products and services, visit our website at daltile.com